

- Controls 4 functions
- Designed to take loads of up to 4 amps (10 sec.) or 3 amps (continuous)
- Requires a single R/C channel
- Selective memory function for first 2 outputs or all 4
- Easy memory selection through jumper
- Automatic R/C signal detection works with all R/C systems, approved for 2.4 GHz
- Module is powered via receiver battery (up to 20V)



Connection

The connector is plugged into the according channel of the receiver. This channel should be controlled either via a stick or a 3-position switch (on/off/on) on the transmitter.

Connection of devices as per diagram below.

Setup

When powering up the receiver, the control device (stick or switch) must be in neutral position. This initial condition is automatically assumed to be the neutral position. Deviation of more than 50% of this position will cause the module to switch.


Operation

When pushing the stick or switch in e.g. upper position, channel 1 will be switched on. For switching channel 1 off again this sequence must only be repeated. Channel 2 is operated in the same manner but in opposite direction.

For switching channels 3 and 4 the stick or switch must only be held longer in their respective switching positions.

For channels 1 and 2 the switch sequence is approx. half a second, for channels 3 and 4 about 1 second.

Furthermore, the memory function can be deactivated for these two channels by pulling the jumper. Then switching only takes place as long as the stick or switch is held in its respective ON position; with the stick or switch back in neutral brings the channel back in its OFF position.

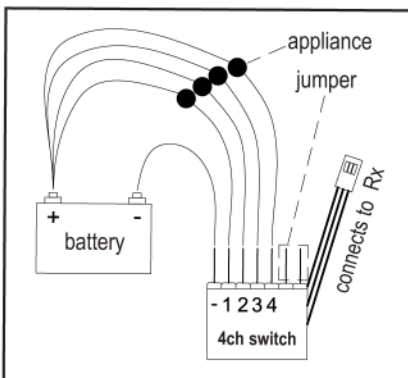

WARNING! This item is not a toy and therefore not suitable for persons under 16 years of age. Please adhere to your country's safety guidelines during construction and operation of this item. We are not liable for any personal injury or damage of any kind resulting with the assembly and/or use of our products as we are neither able to delegate nor verify the assembly and/or use of these items. 24 Month Limited Warranty: The manufacturer of this unit warrants this product to be free from defects in material and workmanship for a period of 24 (twenty-four) months from date of purchase. During that period, we will repair or replace, at our option, any unit supplied through us that does not meet these standards. You will be required to provide proof of purchase (receipt or invoice). Defects caused by abuse, misuse, or accident, etc. are not covered under this warranty. Under no circumstances will the purchaser be entitled to consequential or incidental damages. If you attempt to disassemble, modify or repair this unit in any way yourself warranty will be void.